
Integ E Series

The Power Extender

EDA-Backup Box

EDA-4115/4225/4400-01

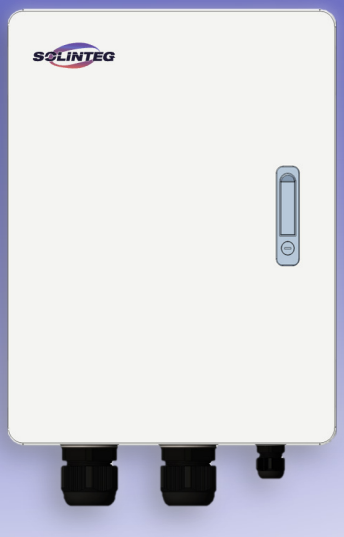

EDA-Backup Box

Model		EDA-4115-01	EDA-4225-01	EDA-4400-01
Electric Parameter				
Rated Voltage	[V]	3L/N/PE; AC 400		
Rated Current (AC-3)	[A]	115	225	400
Rated Power	[kW]	50	100	200
Rated Frequency	[Hz]	50/60		
Switching Time	[ms]	≤50		
Inverter Configuration				
No. of Configured Inverters	MHT-25K-100	2	4	4
	MHT-30K-100	2	3	4
	MHT-36K-100	1	3	4
	MHT-40K-100	1	2	4
	MHT-50K-100	1	2	4
General Data				
Dimensions	[W×H×D mm]	456x570x230	566x800x255	566x800x255
Weight	[KG]	20	37	40
Control Signal		DI		
Mounting Type		Wall Mounting		
Protection Class		IP54		
Enviromental Parameter				
Operating Temperature Range	[℃]	-25~40		
Relative Humidity	[%]	≤50% Relative Humidity at +40℃		
Operating Altitude	[m]	≤3000		

©2025 Solinteg Power Co., Ltd. All rights reserved.
sales@solinteg.com
www.solinteg.com